

2Eyes 200W LED COB Blinder

Warm White LightingLED COB Blinder

Warm White Lighting

SHEHDS[®]

Stage Lighting Equipment Supplier Expert

WELCOME TO JOIN US

USER'S MANUAL

Maintenance



1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

Statement

The product has well capability and intact packing when leave factory,All of the user should comply with above warning item and manual ,any misuse cause of the damages are not included in our guarantee,and also can't be responsible for any malfunction & problem owing to ignore the manual.

Please forgive that we will not be notice for technical change

Attention Item

- 1.For guarantee the life of product,please do not put it on the wet place and not use it the place over 40 degree.
- 2.Please don't lay the product on the un-fixable or shakable place.
- 3.Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.
- 4.Power supply should not be changed over +&-10% while the light is using,it will be decreased the life of lamp if the power is too high,but it will be influenced the luminosity if the power is too low.
- 5.After power off,if it is need used again,please cool down over 20 minuter.
- 6.Please look round the manual for ensure the product can be used normally.

DMX Channel Summary-d001(2CH) Channels Mode A001

Channel	Value	Function
3	0-255	1# Light COB dimming, from dark to bright
4	0-255	2# Light COB dimming, from dark to bright

DMX Channel Summary-a001(4CH) Channels Mode A001

Channel	Value	Function
1	0-255	Total dimming, from dark to bright
2	0-255	Total strobe, 005-255 from slow to fast
3	0-255	1# Light COB dimming, from dark to bright
4	0-255	2# Light COB dimming, from dark to bright

DMX Channel Summary-H001(6CH) Channels Mode A001


Channel	Value	Function
1	0-255	Total dimming, from dark to bright
2	0-255	Total strobe, 005-255 from slow to fast
3	50-100	Manual Mode(CH4 Control)
	101-150	Auto Run 1
	151-200	Auto Run 2
	201-250	Auto Run 3
	251-255	Sound control
4	0-255	Function Speed (CH3)
5	0-255	1# Light COB dimming, from dark to bright
6	0-255	2# Light COB dimming, from dark to bright

Display Control Instruction

Display	Value	Function
H001	001- 512	6 channel mode
A001	001- 512	4-channel mode
d001	001- 512	2-channel mode
CL00	0-3	Selection of color
CC01	0-15	Color jumps
dE01	0-15	Color gradient
cp01	0-15	The program is self-propelled
U255	0-255	R1 lights up
C255	0-255	R2 lights up
F255	0-255	Strobe
suod	suod	Voice control mode

Display Control Instruction

Welcome to use our light. The light uses energy-saving LED, long Product life, shockproof, dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects, easy to operate, suitable for all types of entertainment decoration, architectural lighting industry.

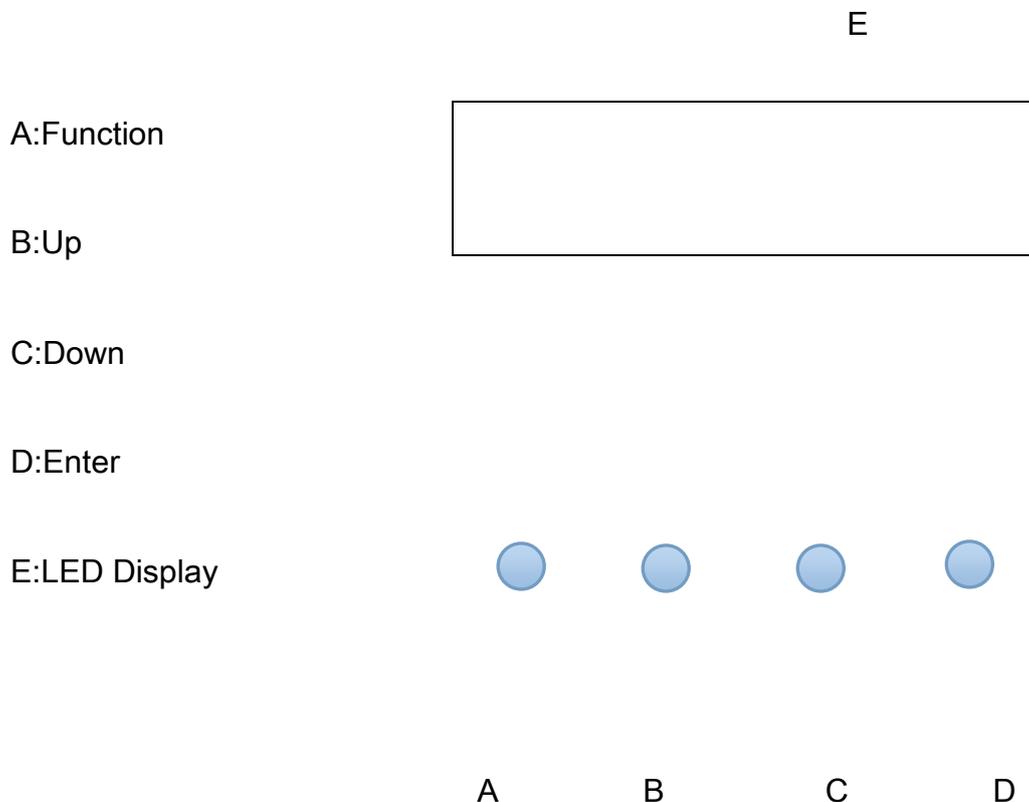

Instructions: Press the function key A cycled out the eight different function effects, digital tube first two digits on behalf of which the current function (see menu). The last two digits represent the functions in which the address code or speed parameters. Press the B or C key to modify the parameter values. Press the D key to confirm.

Product Introduction

- * Power Supply:AC90--275V,50--60HZ
- * Power consumption:200W
- * Fixing lamp:LED 2×100W Warm White
- * DMX-Control-channels:2/4/6 DMX Channels
- * Shuttle:Flash rate:0--10HZ
- * Dimmer:0-100% mechanic dimmer
- * Long Lifespan LEDs(more than 60,000 hours)