


Display Control Instruction

Welcome to use our Aluminum alloy LED Flat Par 18x18W Lighting. The light uses energy-saving LED, long Product life, shockproof, dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects, easy to operate, suitable for all types of entertainment decoration, architectural lighting industry.

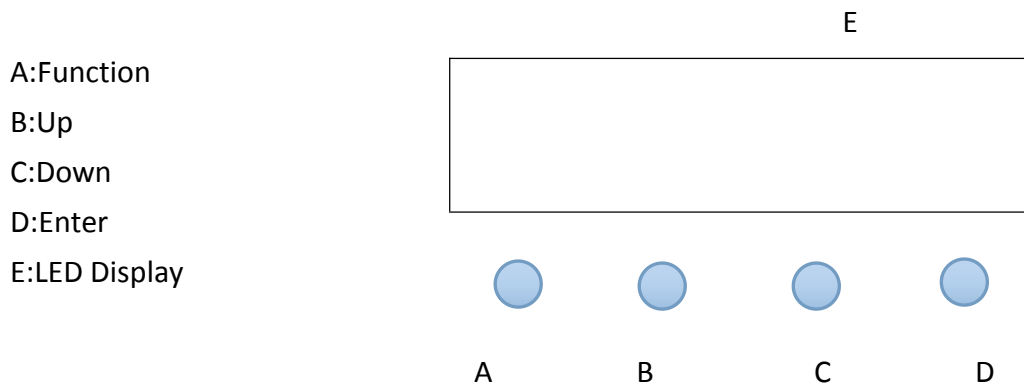

Instructions: Press the function key A cycled out the eight different function effects, digital tube first two digits on behalf of which the current function (see menu). The last two digits represent the functions in which the address code or speed parameters. Press the B or C key to modify the parameter values. Press the D key to confirm.

Product Introduction

- * Power Supply: AC90--275V, 50--60HZ
- * Power consumption: 320W
- * Fixing lamp: LED Par Can 18x18W RGBWA+UV
- * DMX-Control-channels: 6/10 DMX Channels
- * Shuttle: Flash rate: 0--10HZ
- * Dimmer: 0-100% mechanic dimmer
- * Operational modes: DMX512, Auto Run, Sound action, Strobe, Stand Alone and Master/Slave, With Rich Advanced Built-in Programs.
- * Beam Angle: 25/35/40/45 degree
- * Long Lifespan LEDs (more than 60,000 hours)
- * Weight: 2.25 KG
- * Product size: 21.5x11.2x21.5 cm

Aluminum alloy LED Flat Par 18x18W Lighting



Please carefully read the product description before use

Maintenance

1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

Statement

The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual ,any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual.

Please forgive that we will not be notice for technical change

Attention Item

- 1.For guarantee the life of product,please don't put it on the wet place and not use it the place over 40 degree.
- 2.Please don't lay the product on the un-fixable or shakable place.
- 3.Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.
- 4.Power supply should not be changed over +&-10% while the light is using,it will be decreased the life of lamp if the power is too high,but it will be influenced the luminosity if the power is too low.
- 5.After power off,if it is need used again,please cool down over 20 minuter.
- 6.Please look round the manual for ensure the product can be used normally.

DMX Channel Summary-6 Channels Mode

Channel	Value	Function
CH1	R dimming	Red dimming, from dark to light
CH2	G dimming	Green dimming, from dark to light
CH3	B dimming	Blue dimming, from dark to light
CH4	W dimming	White dimming, from dark to light
CH5	A dimming	Amber dimming, from dark to light
CH6	U dimming	Violet dimming, from dark to light

DMX Channel Summary-10 Channels Mode

Channel	Value	Function
CH1	Total dimming	R, G, B, W, A total dimming, from dark to bright
CH2	R dimming	R dimming, from dark to bright
CH3	G dimming	G dimming, from dark to bright
CH4	B dimming	B dimming, from dark to bright
CH5	W dimming	W dimming, from dark to bright

CH6	A dimming	A dimming, from dark to bright
CH7	U dimming	U dimming, from dark to bright
CH8	Total strobe	R, G, B, W, A flash, from slow to fast
CH9	Function selection	000-050:CH1-CH7 control; 051-100: color output (8 kinds), selected by CH9; 101-150: jump; 151-200: gradient; 201-250 pulse change;
CH10	Function speed	Function speed, from slow to fast

Display Control Instruction

NO	SHOW	Function Declaration
1	d001	DMX512 address code set -6 channel mode
2	A001	DMX512 address code set -10 channel mode
3	r255	Red dimming, dark to light.
4	G255	Green dimming, from dark to light.
5	b255	Blue dimming, from dark to light.
6	u255	White dimming, from dark to light.
7	Y255	Amber dimming, from dark to light.
8	P255	Violet dimming, from dark to light.
9	FH99	Strobe, speed from slow to fast.
10	CL01	8 color output.
11	CC01	Colorful jump, from slow to fast.
12	DE99	Colorful gradient, from slow to fast.
13	CP99	Colorful pulse change, from slow to fast.
14	SU01	7 color strobe, 7 color jump