


## Display Control Instruction

Welcome to use our LED Beam Spider 8x10W RGBW Lighting. The light uses energy-saving LED, long Product life, shockproof, dust-proof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects, easy to operate, suitable for all types of entertainment decoration, architectural lighting industry.

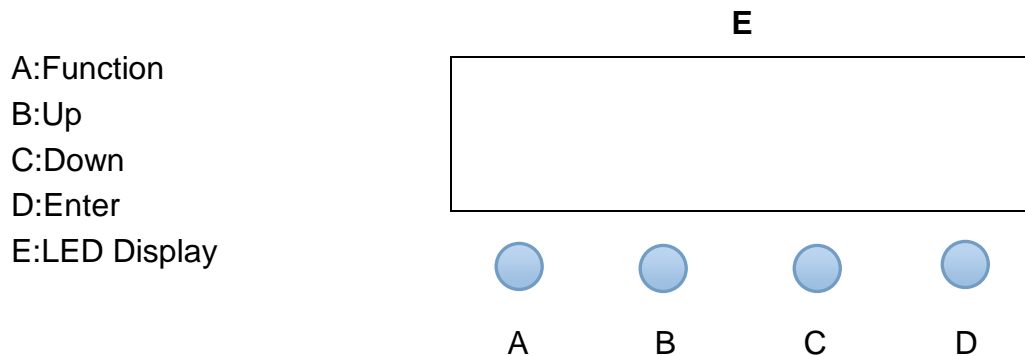

Instructions: Press the function key A cycled out the 10/36 different function effects, digital tube first two digits on behalf of which the current function (see menu). The last two digits represent the functions in which the address code or speed parameters. Press the B or C key to modify the parameter values. Press the D key to confirm.

## Product Introduction

- \* Input voltage: AC90--240V, 50--60HZ
- \* Power consumption: 80W
- \* LED Source : 8x10W RGBW 4in1
- \* DMX Control-Channels: 10/36 Channels , DMX512 3-Pin
- \* Dimmer: 0-100% mechanic dimmer
- \* Operational modes: DMX512, Auto Run, Sound action, Strobe, Stand Alone and Master/Slave, With Rich Advanced Built-in Programs.
- \* Pan/Tilt: X axis 145 degree,
- \* Display: LED display
- \* Material structure: high temperature resistant plastic
- \* Long Lifespan LEDs (more than 60,000 hours)
- \* Product dimension: 42x26x22CM
- \* Product Weight: 6KG

# LED Beam Spider 8x10W RGBW Lighting User's Manual



**Please carefully read the product description before use**

## **Maintenance**

1. Please keep the light in dryness and avoiding use in wet place.
2. Using Intermittent can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic solvent for avoid to damaged the product.

## **Statement**

The product has well capability and intact packing when leave factory,All of the user should comply with above warning item and manual ,any misuse cause of the damages are not included in our guarantee,and also can't be responsible for any malfunction & problem owing to ignore the manual.

Please forgive that we will not be notice for technical change

### **Attention Item**

- 1.For guarantee the life of product,please don't put it on the wet place and not use it the place over 40 degree.
- 2.Please don't lay the product on the un-fixable or shakable place.
- 3.Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.
- 4.Power supply should not be changed over +&-10% while the light is using,it will be decreased the life of lamp if the power is too high,but it will be influenced the luminosity if the power is too low.
- 5.After power off,if it is need used again,please cool down over 20 minuter.
- 6.Please look round the manual for ensure the product can be used normally.

**DMX Channel Summary-10 Channels Mode**(when the DMX signal is received, the last decimal point of the digital tube will blink, otherwise it will not be received.)

| <b>Channel</b> | <b>Value</b> | <b>Function</b>    |
|----------------|--------------|--------------------|
| CH1            | 0-255        | No.1 Motor Rotates |
| CH2            | 0-255        | No.2 Motor Rotates |
| CH3            | 0-255        | Total Dimmer       |
| CH4            | 0-9          | NO Effect          |
|                | 10-255       | Strobe             |
| CH5            | 0-255        | Red Dimmer         |
| CH6            | 0-255        | Green Dimmer       |
| CH7            | 0-255        | Blue Dimmer        |
| CH8            | 0-255        | White Dimmer       |
| CH9            | 0-7          | NO Effect          |
|                | 8-7          | Effect 1           |
|                | 18-27        | Effect 2           |
|                | 28-37        | Effect 3           |
|                | 38-47        | Effect 4           |

|      |         |                   |
|------|---------|-------------------|
|      | 48-57   | Effect 5          |
|      | 58-67   | Effect 6          |
|      | 68-77   | Effect 7          |
|      | 78-87   | Effect 8          |
|      | 88-97   | Effect 9          |
|      | 98-107  | Effect 10         |
|      | 108-117 | Effect 11         |
|      | 118-127 | Effect 12         |
|      | 128-136 | Effect 13         |
|      | 137-146 | Effect 14         |
|      | 147-156 | Effect 15         |
|      | 157-166 | Effect 16         |
|      | 167-176 | Effect 17         |
|      | 177-186 | Effect 18         |
|      | 187-196 | Effect 19         |
|      | 197-206 | Effect 20         |
|      | 207-216 | Effect 21         |
|      | 217-226 | Effect 22         |
|      | 227-236 | Effect 23         |
|      | 237-246 | Effect 24         |
|      | 247-255 | Sound Control     |
| CH10 | 0-255   | CH9-Speed Control |

**DMX Channel Summary-36 Channels Mode**(when the DMX signal is received, the last decimal point of the digital tube will blink, otherwise it will not be received.)

| Channel | Value         | Function            |
|---------|---------------|---------------------|
| CH1     | 0-255         | No.1 Motor Rotates  |
| CH2     | 0-255         | No.2 Motor Rotates  |
| CH3     | 0-255         | Total Dimmer        |
| CH4     | 0-9<br>10-255 | NO Effect<br>Strobe |
| CH5     | 0-255         | LED1 Red Dimmer     |
| CH6     | 0-255         | LED1 Green Dimmer   |
| CH7     | 0-255         | LED1 Blue Dimmer    |
| CH8     | 0-255         | LED1 White Dimmer   |

|      |       |                   |
|------|-------|-------------------|
| CH9  | 0-255 | LED2 Red Dimmer   |
| CH10 | 0-255 | LED2 Green Dimmer |
| CH11 | 0-255 | LED2 Blue Dimmer  |
| CH12 | 0-255 | LED2 White Dimmer |
| CH13 | 0-255 | LED3 Red Dimmer   |
| CH14 | 0-255 | LED3 Green Dimmer |
| CH15 | 0-255 | LED3 Blue Dimmer  |
| CH16 | 0-255 | LED3 White Dimmer |
| CH17 | 0-255 | LED4 Red Dimmer   |
| CH18 | 0-255 | LED4 Green Dimmer |
| CH19 | 0-255 | LED4 Blue Dimmer  |
| CH20 | 0-255 | LED4 White Dimmer |
| CH21 | 0-255 | LED5 Red Dimmer   |
| CH22 | 0-255 | LED5 Green Dimmer |
| CH23 | 0-255 | LED5 Blue Dimmer  |
| CH24 | 0-255 | LED5 White Dimmer |
| CH25 | 0-255 | LED6 Red Dimmer   |
| CH26 | 0-255 | LED6 Green Dimmer |
| CH27 | 0-255 | LED6 Blue Dimmer  |
| CH28 | 0-255 | LED6 White Dimmer |
| CH29 | 0-255 | LED7 Red Dimmer   |
| CH30 | 0-255 | LED7 Green Dimmer |
| CH31 | 0-255 | LED7 Blue Dimmer  |
| CH32 | 0-255 | LED7 White Dimmer |
| CH33 | 0-255 | LED8 Red Dimmer   |
| CH34 | 0-255 | LED8 Green Dimmer |
| CH35 | 0-255 | LED8 Blue Dimmer  |
| CH36 | 0-255 | LED8 White Dimmer |

## Display Control Instruction

| Display | Function                                   |
|---------|--|
| ADDR    | DMX Channel Address, ( A001--A512 )        |
| CHND    | DMX Channel :10/36CHs( Channel Selection ) |
| SLND    | MAST,SL1,SL2,( Master/Slave Selection )    |

|      |  |
|------|--|
| AUTO | AT1--AT25:Effect Selection,AT24:Multi-Effect Automatic,AT25:Sound Mode;SPED01-08,speed from slow to fast |
| SOUD | ON,OFF( switch for Sound )   |
| SENS | Sensitivity for Sound( 0-100 )   |
| LED  | ON,OFF( switch for background light )  |
| DISP | YES,NO( Reverse Display )  |
| 1TIL | YES,NO( Motor 1 Reverse )  |
| 2TIL | YES,NO( Motor 2 Reverse )  |
| TEST | Automatic Testing  |
| RSET | YES,NO   |